

World's Leading Manufacturer Of Fibreglass Whip Antennas



SPECIALISTS FOR HIGH FREQUENCY

# 35Ft Aluminum Whip Antenna AS-3772B/U

NSN 5985-01-383-8451

THE AS-3772B/U 35 FOOT ALUMINUM WHIP ANTENNA IS DESIGNED AND BUILT TO MEET THE US NAVY REQUIREMENTS FOR SHIPBOARD ANTENNAS, SPECIFICALLY MIL-A-29517(EC). IT MEETS OR EXCEEDS THESE REQUIREMENTS IN EVERY RESPECT.


THE ANTENNA IS USED FOR COMMUNICATIONS IN THE 2 TO 30 MHz FREQUENCY RANGE AND CAN BE INSTALLED AND OPERATED IN THE VERTICAL, TILTED OR HORIZONTAL POSITIONS.

THE ANTENNA CONSISTS OF A TAPERED ALUMINUM RADIATING ELEMENT AND AN INTEGRAL FIBREGLASS INSULATOR AND BASE MOUNTING FLANGE. IT IS A TWO PIECE ANTENNA WHICH HAS THREE SIDE FEED POINTS. THE INTEGRAL INSULATOR AND BASE MOUNTING FLANGE IS BONDED TO THE BOTTOM OF THE RADIATING ELEMENT. A DRIP SHIELD IS PROVIDED JUST BELOW THE LOWER FEED POINT.

THE MECHANICAL STRENGTH OF THE INTEGRAL INSULATOR AND MOUNTING FLANGE IS ACHIEVED WITH A PATENTED PROCESS USING HIGH STRENGTH FILAMENT FIBREGLASS AND EPOXY RESIN.


## FEATURES:

- **POWER HANDLING TO 5KW**
- **MINIMUM MAINTENANCE**
- **HIGH RELIABILITY**
- **SHIPBOARD APPLICATIONS**
- **BROADBAND**
- **WEATHERPROOF**

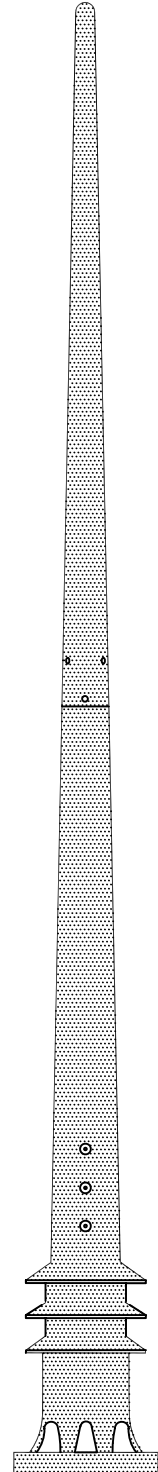

# AS-3772B/U

## QUICK REFERENCE DATA

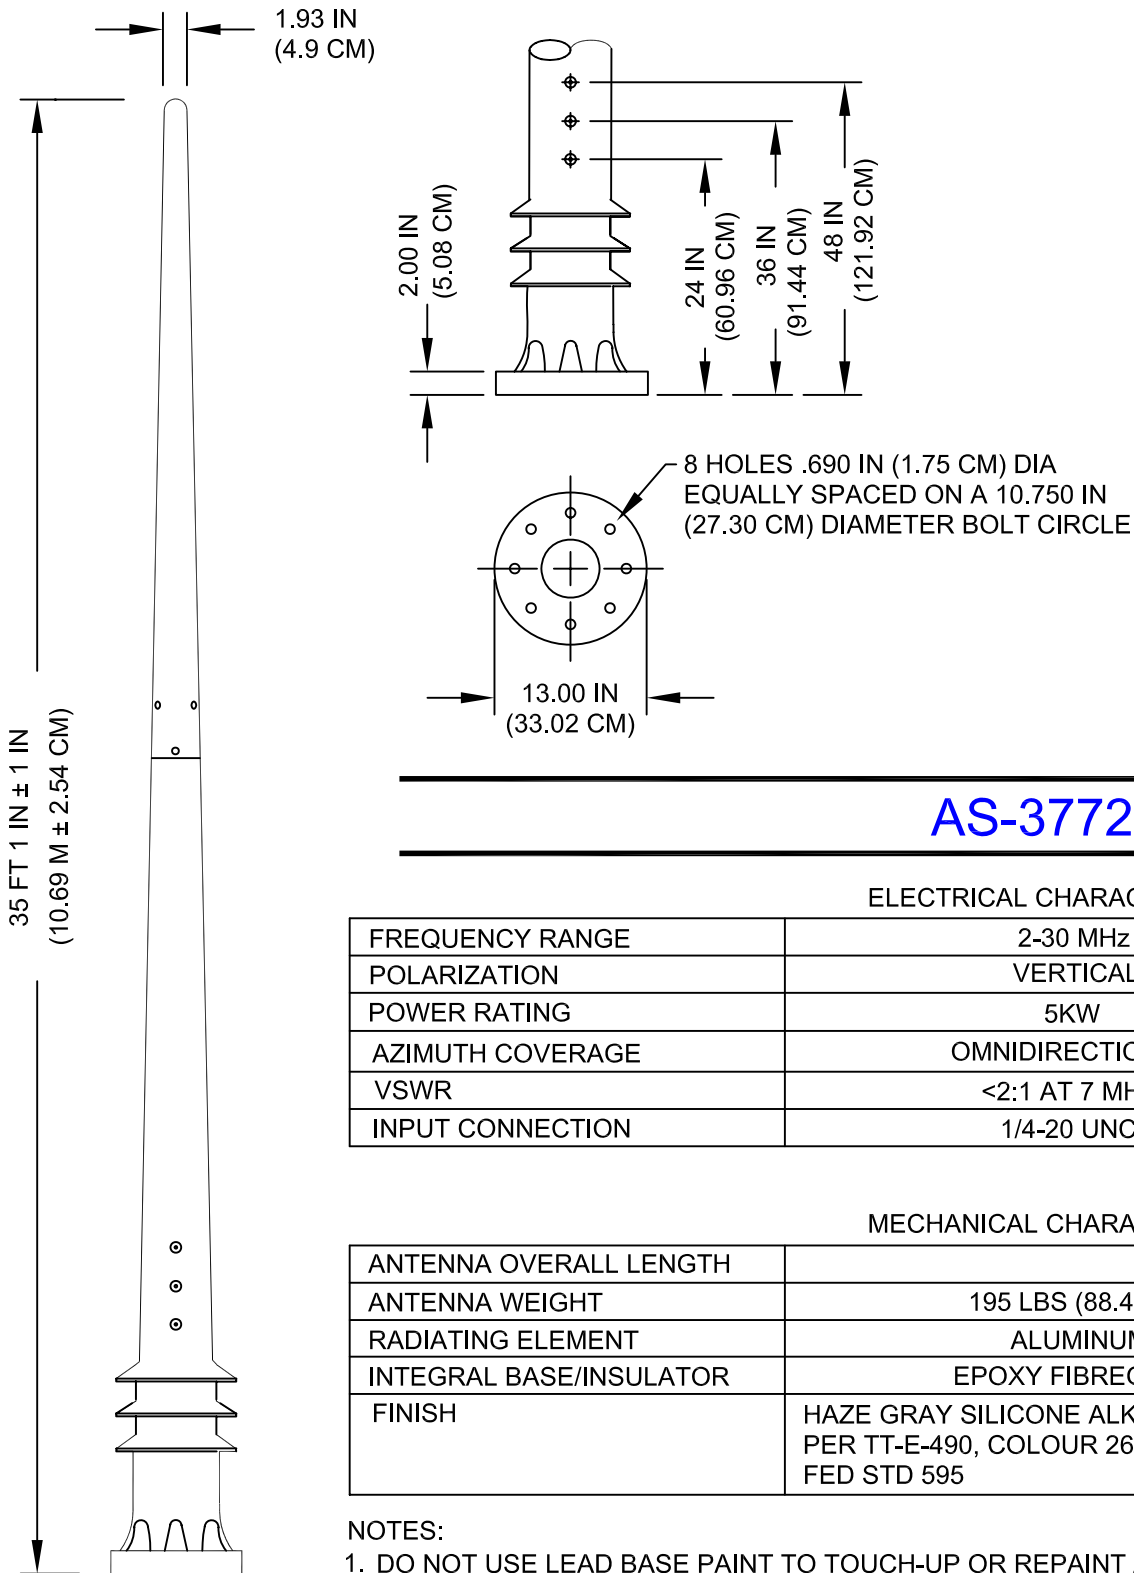

## AS-3772B/U

### ELECTRICAL CHARACTERISTICS

FREQUENCY RANGE	2-30 MHz
POLARIZATION	VERTICAL
POWER RATING	5KW
AZIMUTH COVERAGE	OMNIDIRECTIONAL
VSWR	<2:1 AT 7 MHz
INPUT CONNECTION	1/4-20 UNC

### MECHANICAL CHARACTERISTICS

ANTENNA OVERALL LENGTH	
ANTENNA WEIGHT	195 LBS (88.4 KG)
RADIATING ELEMENT	ALUMINUM
INTEGRAL BASE/INSULATOR	EPOXY FIBREGLASS
FINISH	HAZE GRAY SILICONE ALKYD ENAMEL PER TT-E-490, COLOUR 26270 PER FED STD 595

### NOTES:

- DO NOT USE LEAD BASE PAINT TO TOUCH-UP OR REPAINT ANTENNA.



P.O. BOX 603 GUELPH, ONTARIO, CANADA, N1H 6L3  
TEL 519-824-3220 FAX 519-824-3411

INTERNET: [www.valcom-guelph.com](http://www.valcom-guelph.com) EMAIL: [enquiries@valcom-guelph.com](mailto:enquiries@valcom-guelph.com)